Rack Mount PDU with UK Mains Plug & IEC C13 Sockets

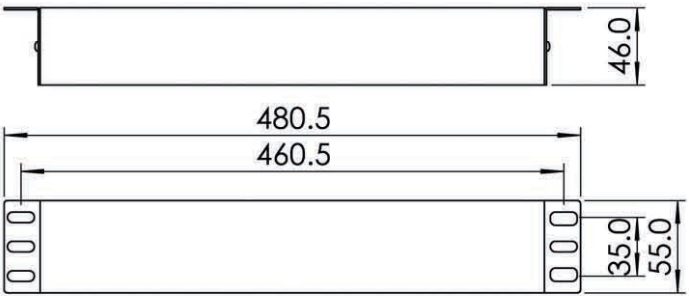

9428H-4	Horizontal 4 x IEC C13 Sockets to UK Mains Plug 3Mtr
9428H-8	Horizontal 8 x IEC C13 Sockets to UK Mains Plug 3Mtr
9428H	Horizontal 12 x IEC C13 Sockets to UK Mains Plug 3Mtr
9428H-16	Horizontal 16 x IEC C13 Sockets to UK Mains Plug 3Mtr

Compliance:	- CE Compliant: 93/68/EEC - BS5773: 1995 - BS1363-1: 1995 - BS EN 60950: 2000 - BS1363-2: 1995 - IEC/EN 60320-2-2 / IEC/EN 60320-1 - IEC 60309-1 (BS4343)
Materials:	- Accessories: Polycarbonate - Body: Aluminium Extrusion: BS1474 (1987) Alloy 6063T6 - Finish: Catagory 3 - Anodised Black - End Brackets: Mild Steel: CR4 BS10130: 1991
Current:	- 10Amps per Outlet - 16Amps Total Load with: UK Plug Top 16Amp BS4343 Plug IEC C14 Plug IEC C20 Plug - 32Amps Total Load with: 32Amp BS4343 Plug
Voltage:	230 - 250V a.c.
Frequency:	50Hz
Connection Details:	- 1.5mm² x 3Mtrs 3core HO5VV-F Flex to BS1363 Plug fused @13Amps, 16Amp BS4343 Plug, IEC C14 Plug,IEC C20 Plug via strain relief gland. - 4.0mm² x 3Mtrs 3core HO5VV-F Flex to 32Amp BS4343 Plug via strain relief gland.
Box Quantity:	1 piece / 1.24Kgs(X198EN) / 0.0054M³
Environmental Issues:	- *Packaging Waste:* Cardboard - 0.0015Kg / 125T/125T B Flute RoHS Compliant - ref: 2002/95/EC The products manufactured & otherwise supplied by the company do not have any perceived or known hazardous materials or by-products that would be deemed hazardous to the environment.